



Fred SR
With 10' capture arm

Fred^{SR}

Self Cleaning, Portable Smoke, Dust & Fume Extractor

This professional grade fume extractor is the industry standard for eliminating smoke, dust and other unbreathables from the air. The powerful blower features a high face-velocity, removing particulate as small as 0.5 micron with our standard MERV 15 rated Nanofiber filter.

Our patented Injection Self-Cleaning System (ICS-360) reduces total cost of ownership by extending filter life expectancy, improving aggregate filter efficiency, and making routine service faster & easier.

Benefits:

- Automatic Filter Cleaning makes service easy
- Compact, portable and easy to operate
- Capture-at-source for cleaner air
- Complies with OSHA guidelines for controlling weld fumes


* Selected Models

Features:

- ICS-360 Injection Self-Cleaning System
- Flexible 10' Externally Articulated Capture Arm
- 21" easy-to-service Nanofiber filter (MERV 15)
- Rotary starter with 15' power cord & casters


Options:

- Flexible externally articulated capture arm 6.5', 10', or 13'
- Automatic self-positioning, Fume Tracker™ capture arm
- 3.0 HP 1800 CFM High-Static Motor [230/460/575V 3PH]
- Odor Absorption Kits
- Minihelic Gauge
- Spunbond Polyester Filter Cartridge (washable)
- After-filter module, with HEPA Filter
- Hood mounted LED light kit

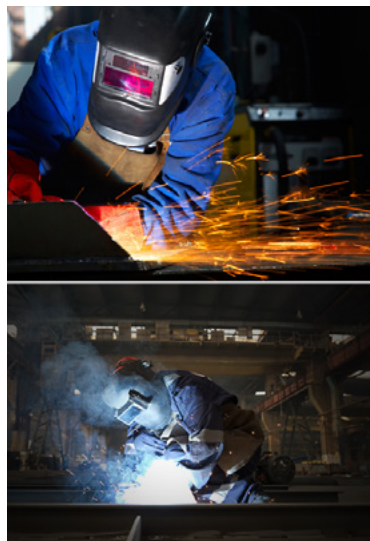

Fred SRS
With floor stand

WELDING • GRINDING • SANDING • DEBURRING

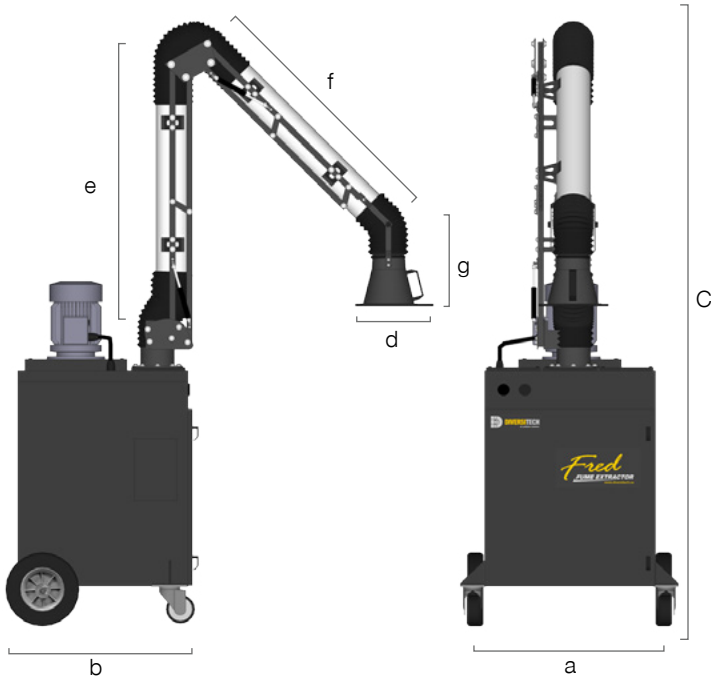

NANOTECH XV



MERV 15 efficient cartridge filter captures particles at the submicron level, and surface-loading technology allows dust to be easily dislodged during cleaning with compressed air.

EFFICIENCY:	MERV 15
FILTER MEDIA:	NANOFIBER
MEDIA AREA:	187 SQ.FT.
COATING:	FIRE RETARDANT
END CAP:	OPEN/OPEN
CLEANING METHOD:	COMPRESSED AIR
MAX TEMP:	180° F / 82° C
FLANGE:	NONE

POLYTECH XI



High strength, high efficiency (MERV 11) cartridge filter made from 100% spun-bond polyester that lowers costs, by allowing for water-based cleaning of captured contaminants.

EFFICIENCY:	MERV 11
FILTER MEDIA:	SPUN-BOND POLY
MEDIA AREA:	105 SQ.FT.
COATING:	FIRE RETARDANT
END CAP:	OPEN/OPEN
CLEANING METHOD:	AIR + WATER WASH
MAX TEMP:	180° F / 82° C
FLANGE:	NONE

Technical Specifications

Model	Motor (H.P.)	Power					Airflow (CFM)	Cord Length (ft.)	Arm Length (ft.)
		Phase (hz)	@120V (amps)	@230V (amps)	@460V (amps)	@575V (amps)			
FRED SR Portable Fume Collector with externally articulated manual capture arm									
FRED SR	1.5	1P/60Hz	13.2	---	---	---	1200	15	10 or 13
	3.0	3P/60Hz	---	7.1	3.7	3.2	1800	---	10 or 13
	5.0	3P/60Hz	---	13.0	6.5	5.2	2500	---	10 or 13

Dimensions

Model	Arm Length (ft.)	Arm Diameter (in.)	Net Weight (lbs.)	Product Dimensions (in.)							Shipping Dimensions (in.)			Gross Weight (lbs.)
				Width [a]	Height [C]	Length [b]	[d]	[e]	[f]	[g]	Width	Height	Length	
FRED SR Portable Fume Collector with externally articulated manual capture arm														
FRED SR	10	6	285	32.5	115	33	13	60	34	18.5	48	90	54	330
	13	6	290	32.5	128	33	13	60	60	18.5	48	90	54	335

HEAD OFFICE

2500 Alphonse Gariépy
Montreal, QC H8T 3M2

CANADA

Montreal, QC
Toronto, ON



UNITED STATES

Trenton, NJ
Chicago, IL

CONTACT US

Toll Free: 1-800-361-3733
info@diversitech.ca