



**DD 5x10**

## INDUSTRIAL **DOWNDRAFT** TABLES

Diversitech's DD series of industrial downdraft tables are the trusted choice of North America's largest manufacturers, and are built to withstand the most demanding applications. Any fumes, smoke or dust from your production activities can be captured right as they are produced, before compromising your indoor air quality. Your choice of standard table sizes range from 3'x4' to 5'x10', and larger worksurfaces can be easily created by "mirroring" multiple tables.

All downdraft tables come fitted with multi-stage spark arrestance baffles, dual 10" diameter exhaust silencers and an automatic reverse-pulse filter cleaning system to help reduce maintenance requirements. Many options and accessories are available for the DD series of downdraft tables, and tables can be custom configured and built-to-order in almost any configuration.



**DD 3x4**



**DD 3x6**

### Ideal Applications:

- Welding
- Grinding & Deburring
- Oxy Cutting
- Spray Painting
- Sanding & Buffing
- Powder Mixing
- Odor Control
- Utility Table
- Finishing

Reliable, all-in-one, downdraft solution for dust, smoke, or fumes produced from welding, grinding, deburring, cutting, sanding, finishing, soldering, painting, or mixing.

### Features:

- High capture face velocity
- Multi-stage spark arrestance baffling
- Reverse pulse cleaning system

### Benefits:

- Hands-free capture-at-source
- Low maintenance, automatic self-cleaning system included
- Complies with OSHA guidelines for safe capture of dust, smoke and weld fumes










Mirrored downdraft tables to create long ventilated worksurface

**WELDING • GRINDING • SANDING • DEBURRING • PAINTING**



## The Industrial Downdraft Family

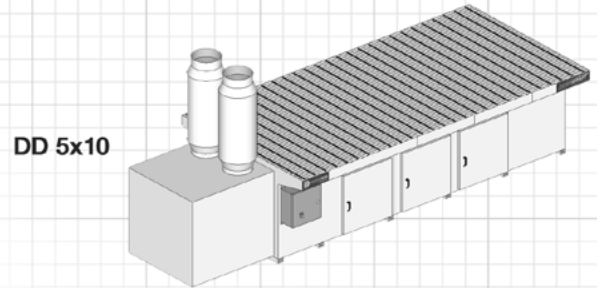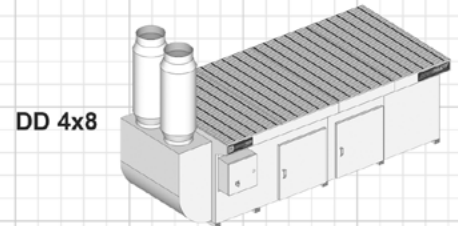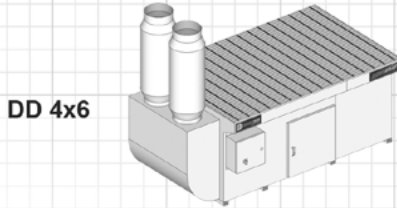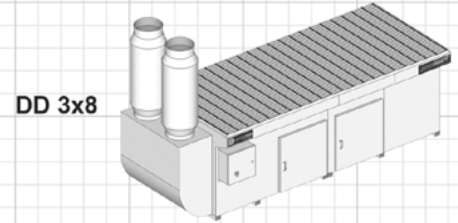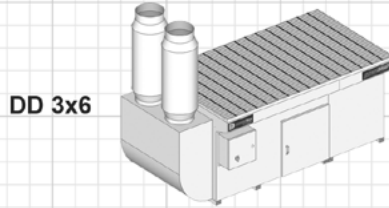

### Options:

- Extended overhang cabinet
- Side and back walls (steel or clear lexan)
- Backdraft hood with sliding gates
- Dust and vapour proof light kit
- Filter service minihelic gauge
- Cushion grid mat for table surface

### Filter Options:

- Activated carbon canister afterfilter
- Spunbond poly cartridge filter (washable) MERV 11
- HEPA afterfilter - MERV 17 - 99.97% @ 0.3 micron

### Welding, Grinding & Deburring Kit:

- Side and back walls
- Metal mesh pre-filter
- Grounding lug



### Plasma Cutting Kit:

- 2" high steel bar grating
- Slag collection baffle with 3/4" gravel
- Metal mesh pre-filter



### VOC & Paint Kit:

- Side and back walls
- Paint arrestor pre-filter
- Reversible carbon canister afterfilter



### Clean Air Workstation:

- Side and back walls (48" high w/top cover)
- Dust & vapor proof light kit
- Backdraft hood





### Primary Filter

### After Filter

**NANOTECH XV**



MERV 15 efficient cartridge filter captures particles at the submicron level, and surface-loading technology allows dust to be easily dislodged during cleaning with compressed air.

EFFICIENCY:	MERV 15
FILTER MEDIA:	NANOFIBER
MEDIA AREA:	140 SQ.FT.
COATING:	FIRE RETARDANT
END CAP:	OPEN/CLOSED
CLEANING METHOD:	COMPRESSED AIR
MAX TEMP:	180° F / 82° C
FLANGE:	NONE


**POLYTECH XI**



High strength, high efficiency (MERV 11) cartridge filter made from 100% spun-bond polyester that lowers costs, by allowing for water-based cleaning of captured contaminants.

EFFICIENCY:	MERV 11
FILTER MEDIA:	SPUN-BOND POLY
MEDIA AREA:	65 SQ.FT.
COATING:	WATER REPELLENT
END CAP:	OPEN/CLOSED
CLEANING METHOD:	AIR + WATER WASH
MAX TEMP:	180° F / 82° C
FLANGE:	NONE

**CARBOTECH 50**



Reusable steel canister filled with 50lbs of activated carbon to filter VOC fumes and odors. Double the filter life by flipping the canister top-to-bottom, allowing for adequate contaminant distribution through the media.

WEIGHT:	50LBS
FILTER MEDIA:	CARBON
MEDIA THICKNESS:	2.6"
COVER:	3/4" ANTIBACTERIAL
END CAP:	TWIST LOCK REMOVABLE
CLEANING METHOD:	NONE
MAX TEMP:	175° F / 80° C
FLANGE:	NONE

**HEPA**




MERV 17 efficient HEPA filter captures particles at the submicron level, it provides the highest level of filtration efficiency 99.97% at 0.3 micron.

EFFICIENCY:	MERV 17
FILTER MEDIA:	HEPA
SIZE:	24" x 24" x 11 1/2"
COATING:	NONE
END CAP:	N/A
CLEANING METHOD:	DISPOSABLE
MAX TEMP:	175° F / 80° C
FLANGE:	NONE

## Technical Specifications

Model	Motor (H.P)	Power				Nominal Airflow (CFM)	Static Pressure (in.)	Face Velocity (FPM)	Noise @5ft (dB)
		Phase (hz)	@230V F.L.A (amps)	@460V F.L.A (amps)	@575V F.L.A (amps)				
<b>Industrial Downdraft Tables, three phase</b>									
DD-3X4	5.0	3P/60Hz	12.8	6.4	4.6	4300	4.0	450	79
DD-3X6	5.0	3P/60Hz	12.8	6.4	4.6	4300	4.0	325	79
	7.5	3P/60Hz	17.0	8.5	7.2	4800	4.0	375	81
DD-3X8	7.5	3P/60Hz	17.0	8.5	7.2	4800	4.0	330	81
	10.0	3P/60Hz	24.0	12.0	9.6	5050	4.0	338	83
<b>Industrial Multi-operator Downdraft Tables, three phase</b>									
DD-4X4	5.0	3P/60Hz	12.8	6.4	4.6	4300	4.0	425	79
DD-4X6	7.5	3P/60Hz	17.0	8.5	7.2	4800	4.0	325	81
	10.0	3P/60Hz	24.0	12.0	9.6	5050	4.0	375	83
DD-4X8	10.0	3P/60Hz	24.0	12.0	9.6	5050	4.0	300	83
DD-5X10	15.0	3P/60Hz	42.0	21.0	17.0	8600	4.0	330	85

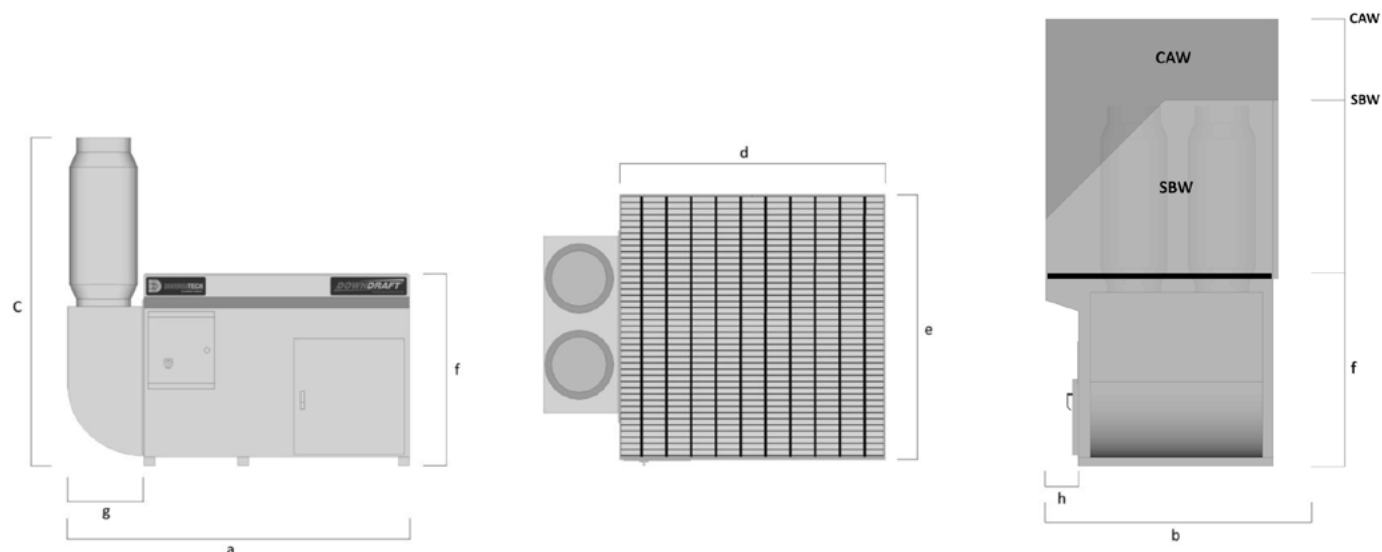

## Dimensions Table

Model	Exhaust Diameter (in.)	Footprint (in.)			Worksurface (in.)		Table Height [f/S&B/CAW]	Net Weight (lbs.)	Exhaust [g]	Overhang [h] (in.)	Shipping Dimensions (in.)			Gross Weight (lbs.)
		Length [b]	Width [a]	Height [c]	Length [e]	Width [d]					Length	Width	Height	
<b>Downdraft Tables, Standard Size</b>														
DD-3X4	10 x 2	43	62	68.5	42	48	36/69/84	258	14	6	76	53	84	624
DD-3X6	10 x 2	43	87	68.5	42	72	36/69/84	329	14	6	105	54	84	850
DD-3X8	10 x 2	43	111	68.5	42	96	36/69/84	421	14	6	122	54	84	1125
DD-4X4	10 x 2	49	63	68.5	48	48	36/69/84	621	14	6 x 2	72	72	84	875
DD-4X6	10 x 2	49	87	68.5	48	72	36/69/84	729	14	6 x 2	102	62	84	1050
DD-4X8	10 x 2	49	111	68.5	48	96	36/69/84	875	14	6 x 2	122	62	84	1320
DD-5X10	10 x 2	61	155	68.5	60	120	36/69/84	1107	34	12 x 2	145	70	84	1890
<b>Downdraft Tables, extended overhang</b>														
DD-3X4-EO	10 x 2	49	63	68.5	48	48	36/69/84	258	14	12	76	65	84	685
DD-3X6-EO	10 x 2	49	87	68.5	48	72	36/69/84	329	14	12	120	65	84	910
DD-3X8-EO	10 x 2	49	111	68.5	48	96	36/69/84	421	14	12	144	65	84	1225
DD-4X4-EO	10 x 2	61	63	68.5	60	48	36/69/84	621	14	12 x 2	89	80	82	945
DD-4X6-EO	10 x 2	61	87	68.5	60	72	36/69/84	729	14	12 x 2	104	80	82	1175

### HEAD OFFICE

2500 Alphonse Gariépy  
Montreal, QC H8T 3M2

### CANADA

Montreal, QC  
Toronto, ON



### UNITED STATES

Trenton, NJ  
Chicago, IL

### CONTACT US

Toll Free: 1-800-361-3733  
info@diversitech.ca